XSERIES
MOBILE FALL PROTECTION
BY MALTA DYNAMICS

SPEC SHEET

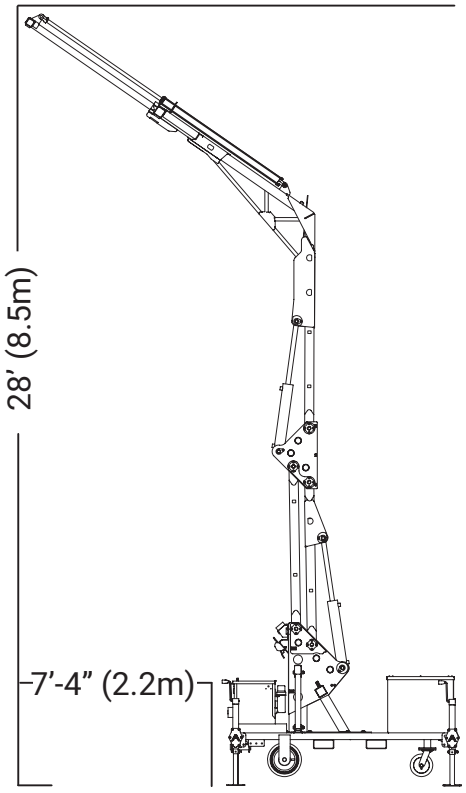

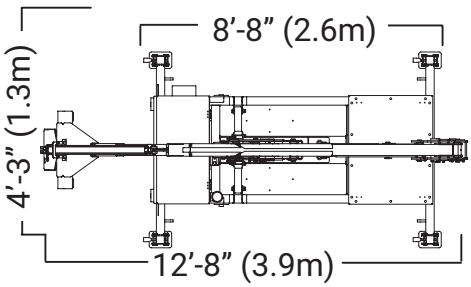

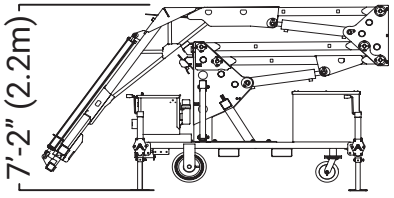

X1200

Safety Standards	
OSHA Fall Arrest Standards	
General	
Max. Working Height	28' (8.5m)
Min. Working Height	2' (.6m)
Max. Folded Height	7'-2" (2.2m)
Frame Width	4'-3" (1.3m)
Max. Arm Reach Out	10'-6" (m)
Overall Length	12'-8" (3.9m)
Max. Anchor Point Capacity	310 lbs
Max. Allowable Users	2
Weight	5500 lbs (2495kg)
Maneuvering	
Towing	Not Road-Towable
Tires	Heavy Duty Non-Marking
Coupling	Drop-Down Lunette Ring
Operation	
Actuating Method	Electric Powered Hydraulic system
Controls	Pendant Remote (15 ft cord length)
Power Source	12 volt Battery (210 Amp hour rating) w/30A Fuse & Battery Guage
Charging System	110 Volt quick Smart Charger with Cord
Outrigger System	Four (4) Manually Adjustable Jacks
Hydraulics	
Fluid Type	Mobile DT10 Excel 22
Fluid Capacity	12.5 Gallons

*Specifications are tentative at this time
*SRLs not included.